

ABC SUSPENSION CLAMPS


- FOR SUSPENSION OF LV ABC

LV suspension clamps for ABC cable are available with a range of cable size capabilities. Some of the range are able to accommodate 2 and 3 core cables as well as 4 core cables

APPLICATION

Suspension of LVABC 25mm² to 150mm²

*Suitable for up to 30° line deviation

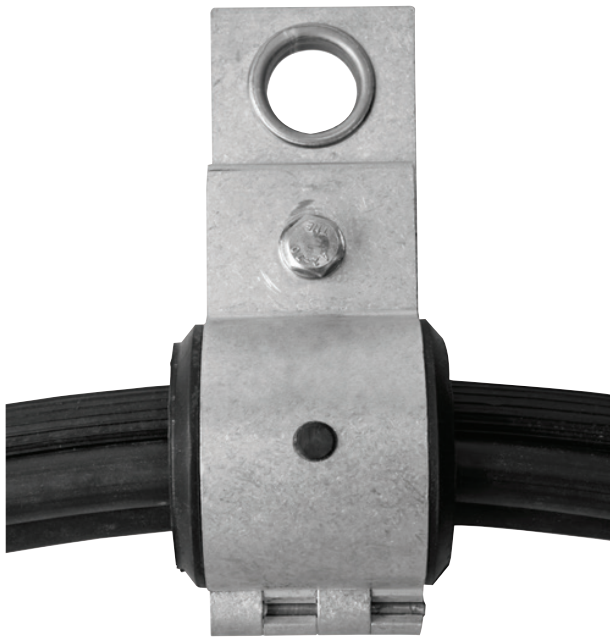

FEATURES

- Aluminium Alloy body with Stainless Steel hardware
- UV resistant Elastomer bushing
- Suitable for up to 30° line deviation
- For line deviation of 30° to 60° please use in conjunction with TNABC2XSUSBRKT, the double suspension yolk bracket
- Stainless Steel wear ring to protect suspension eyelet
- Tested to AS 3766-1990

Stock Code	Diameter of circumscribing circle over laid-up cable cores (mm)	Cable Size (mm ²) (AS3560)		
		2 Core	3 Core	4 Core
TNABCSPC4/35	22-27	50	50	35
TNABCSPC4/50	31-33	-	-	50
TNABCSPC4/70	30-37	95	-	70
TNABCSPC4/95	37-40	-	-	95
TNABCSPC4/150	43-47	-	-	150