

LV JUICE

Smart[®] Band

No matter what your application(s) – if you currently use stainless steel strap, you will be able to use Smart[®] Band as a replacement.

KEY FEATURES

- ✓ No sharp edges
- ✓ Tough, rugged and quick to fit
- ✓ Lightweight
- ✓ UV stable
- ✓ Corrosion resistant, non-magnetic and non-conductive
- ✓ Glass Fibre Strands within band provide superior strength and retention
- ✓ Meets requirements for installation in High-Risk PIM (Passive Intermodulation) Zones. It won't cause interference in wireless networks
- ✓ Perfect for coaxial, fibre optic and all other communication and electrical cables
- ✓ Meets or exceeds Telcordia TR-TSY-00789
- ✓ Made in the UK

TECHNICAL SPECIFICATIONS

CAT NO.	DESCRIPTION
SB-BA-FX-1/2-POM-30M	12.7MM SMART BAND FLEX REEL (30M)
SB-BU-FX-1/2-LH-POM	12.7MM SMART BAND FLEX BUCKLES (100 PCE)
SM-FT-2000-13-FX	12.7MM SMART BAND FLEX MANUAL FITTING TOOL



IN STOCK



SMART[®] BAND
FLEX

SEALED CRIMP CONNECTIONS



ENVIRONMENTALLY SEALED HEATSHRINKABLE CRIMP CONNECTORS


DURASEAL



D4060003
3-6mm²



D4060001
0.38-0.95mm²



D4060002
1.2-2.5mm²



Sold in packs of 20

FEATURES

- ✓ Crimp link inside sealant-lined heatshrink sleeve
- ✓ Adhesive lining enhances protective qualities
- ✓ Completely environmentally sealed - protects from water, condensation, salt, and corrosion
- ✓ Provides strain relief
- ✓ Protects against vibration
- ✓ Fully insulates connection
- ✓ UL, CUL and Lloyds listed

APPLICATIONS

- ✓ Automotive/truck wiring, repair, maintenance & accessory installations
- ✓ OEM automotive/truck wire harness fabrication
- ✓ Commercial wiring (pumps/pools/spas)
- ✓ Marine electronics
- ✓ Fleet maintenance
- ✓ Appliances



AUTHORIZED DISTRIBUTOR

HEATSHRINK CONNECTOR CRIMPER



Professional quality crimper, designed specially for crimping heatshrink style crimp connectors without damaging the insulation.

FEATURES

- ✓ Suitable for red, blue and yellow heatshrink crimp connectors
- ✓ Machined dies
- ✓ Length - 260mm



★
**USE WITH
DURASEAL**

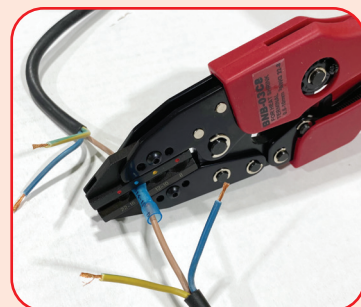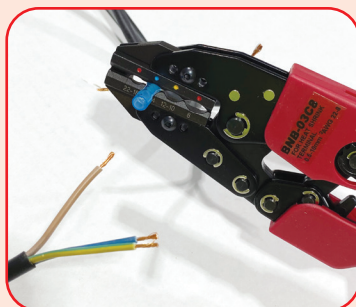

CAT NO.	DESCRIPTION
BNB-03C8	HAND CRIMPER FOR HEATSHRINK STYLE CONNECTORS

All Specials and Products featured in TRANSNET JUICE are available from all good electrical wholesalers.





CCG POSI GRIP GLANDS

Ex db IIC, Ex eb IIC, Ex ta IIIC, Ex nR IIC Compression Gland for Unarmoured Cable

FEATURES AND BENEFITS

- ✓ For highly corrosive Group II, III, Zone 1, 2, 20, 21 and 22 hazardous areas.
- ✓ Complete with a gripper seal, deluge proof seal and elastomeric inner seal for complete explosion and ingress protection IP65/66/68.
- ✓ Brass parts are encapsulated in and protected by a corrosion-resistant material.
- ✓ Marine-grade electroless nickel plated entry threads.
- ✓ Precision manufactured from high-quality brass (Marine Grade Electroless Nickel Plated™).
- ✓ Supplied with a thread sealing gasket.




CCG POSI FLEX GLANDS

Compression Gland for Unarmoured Cable



FEATURES AND BENEFITS

- ✓ For use in highly corrosive areas.
- ✓ Seals the cable sheath to IP66/68.
- ✓ Specially formulated elastomeric seals.
- ✓ Brass parts are encapsulated in a non-corrosive body.
- ✓ Marine grade electroless nickel plated entry threads.
- ✓ Complete with a thread sealing gasket.

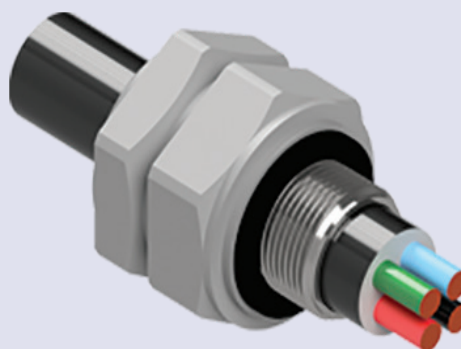



Easy & Secure Connection System for Aluminium Flex Cables

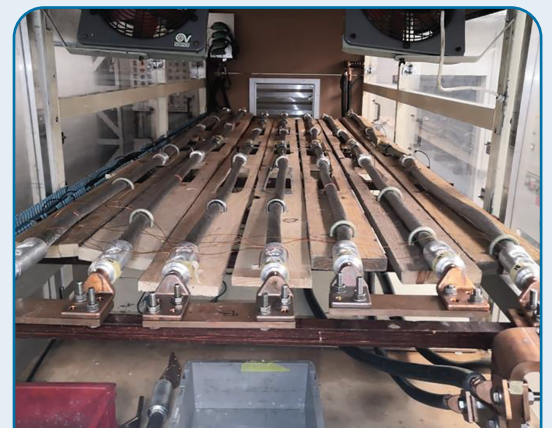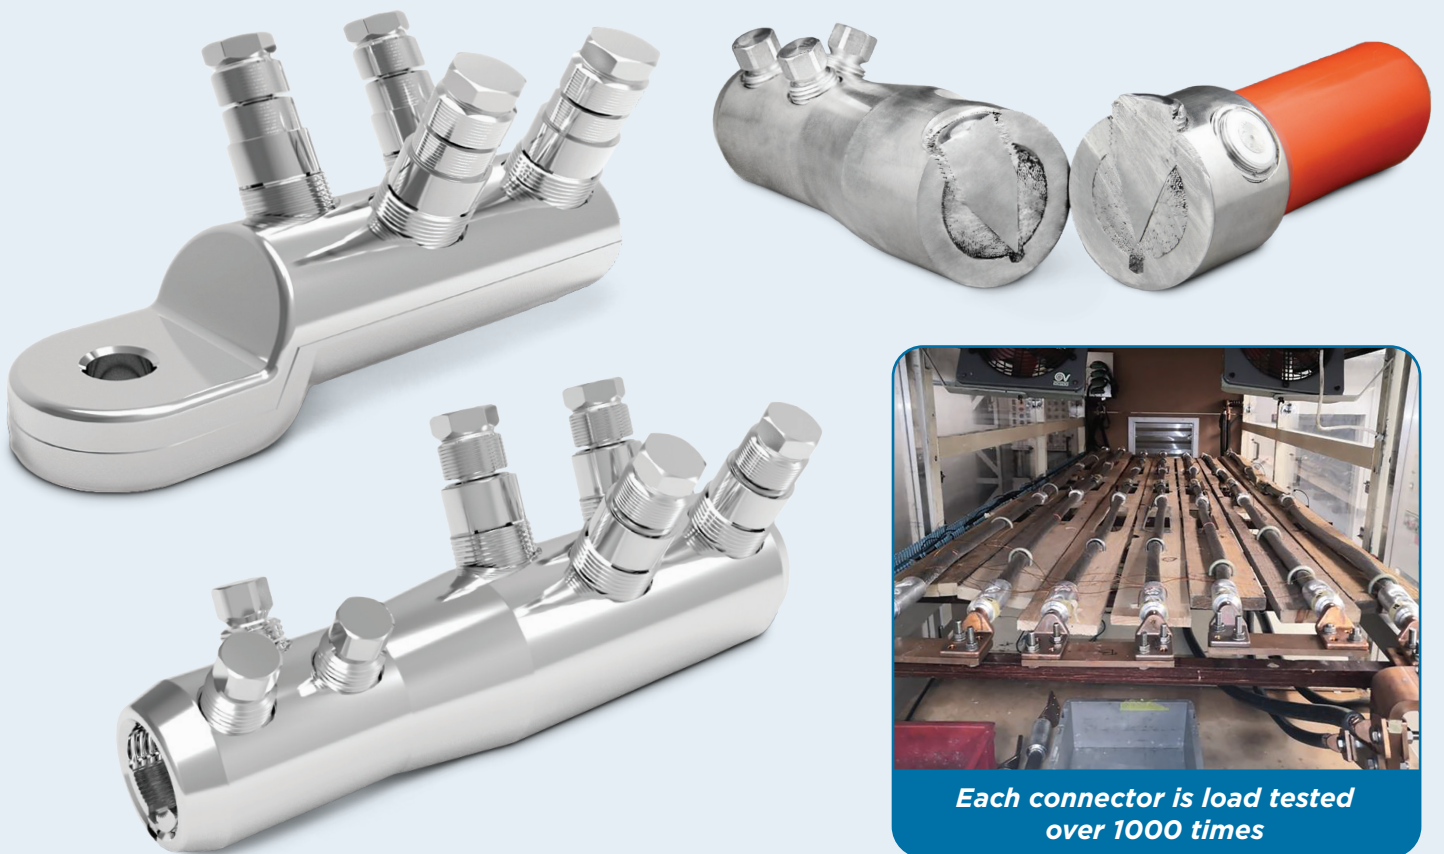


*Each connector is load tested
over 1000 times*

FEATURES AND BENEFITS

- ✓ Torque-controlled shear-head bolts guarantee a good electrical contact
- ✓ Easy installation with standard socket spanner
- ✓ Wide application range from 25mm² to 500mm²
- ✓ Can be used with Aluminium flexible cable (class 5)
- ✓ Compact design and wide application range
- ✓ Tested according to IEC 61238-1 class B
- ✓ Lugs are suitable for indoor & outdoor applications

APPLICATIONS

- ✓ Underground solutions
- ✓ Substations
- ✓ Wind energy solutions




AUTHORIZED DISTRIBUTOR



NVENT Caddy Cable Solutions


FEATURES

- ✓ Easy to mount multiple boxes
- ✓ Notched and marked for easy identification and bending
- ✓ Improved design with stamped inch markings and pilot holes accelerates precise box conduit mounting between studs
- ✓ Requires only a screw gun to install
- ✓ Can be mounted to face or inside of stud
- ✓ Adjustable for non-standard stud spacing
- ✓ Interlocking tab prevents accidental disassembly
- ✓ Unique, one-piece, break apart design

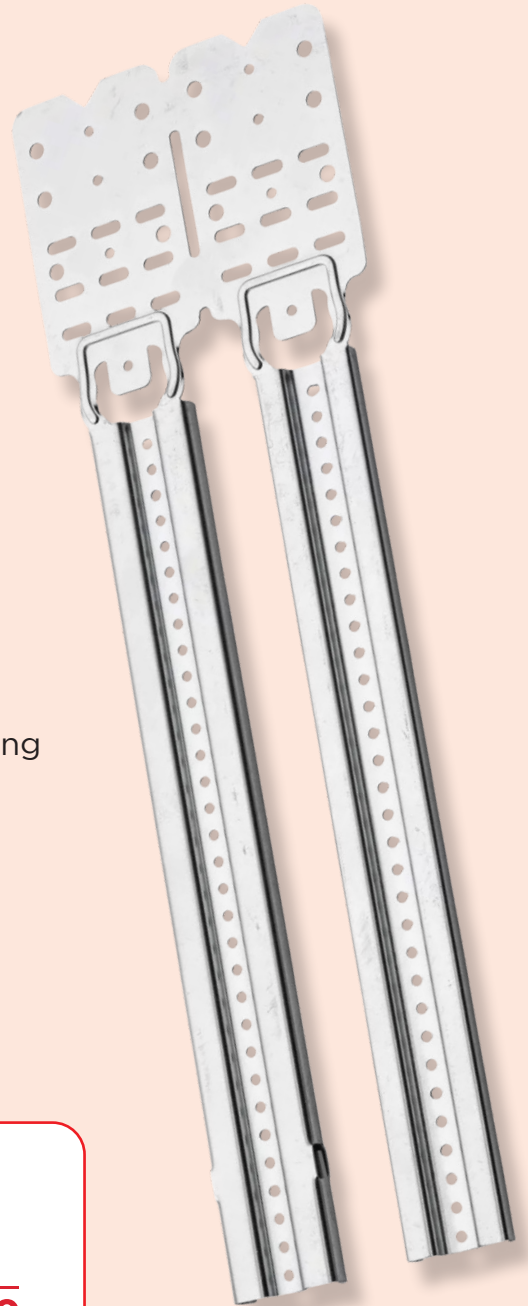

SEE THE
TELESCOPING
BOX BRACKET
IN ACTION


ERICO

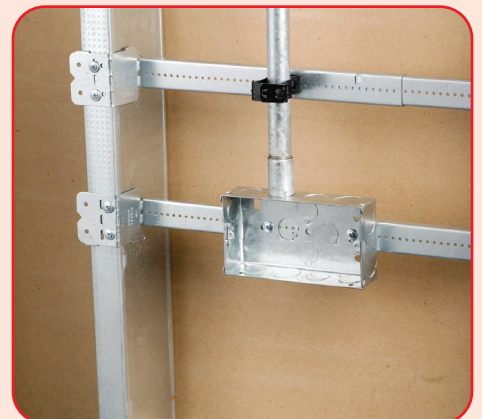



Buy any* Metrel Multifunction Tester and get free MARTL78 + BENTROD

Metrel offers a wide range of multifunctional electrical installation safety testers suitable for testing domestic and industrial electrical installations. They offer a versatile solution for virtually all installation safety testing by combining an array of functionalities and features in a single rugged device, enhanced with a myriad of accessories for even the most specialized applications.



MI3155xx



MI3100BSE



MI3102BT



MI3100S

*Free MARTL78 + BENTROD with MI3100S, MI3100BSE, MI3102BT, MI3155ST and MI3155EU only



**WITH ANY* METREL
MULTIFUNCTION
TESTER PURCHASED
IN DEC & JAN**



VIEW THE RANGE



Do you need versatility? Try TUDS

Whatever the situation, we've got a solution. With a smart modular design, several Class options for lids, a wide product range, and the ability to accommodate many industries and all sorts of jobs – connections, metering, switching, fusing, and more!



LIGHTWEIGHT

90% lighter than the concrete alternative, each panel is easily lifted by one person.



STRONG

The complete unit is rated to requirements of AS3996:2019 for Class B/C applications and has been tested for both top-down strength and sidewall strength. Class D rated lids available on request.



SMART DESIGN

The sidewall Beam-Structure reinforces and locks the pit into the ground making it much stronger once installed. Modular design allows simple onsite adjustment to pit depth.



WIDE RANGE

From 300mm to 1200mm across and 300mm to 900mm deep, this range offers a solution for almost any application.



SAFE

Keep pedestrians safe with P5 rated slip resistance to AS4596:2013.



EASY INSTALL

The knock down panel and bolt free design coupled with flat pack supply and no need for large lifting equipment saves time and money.



FLAT PACK

Significant space savings for easy and efficient shipping and storage.



**UP TO 76%
SPACE SAVING**



FIND OUT MORE

Night Hawk Quality Lighting Solutions

NEW RANGE AVAILABLE EX STOCK



Auckland

78 Cryers Road
East Tamaki
Auckland
NEW ZEALAND
Ph 0800 442 182
PO Box 39 383
Howick, Auckland

Wellington

10 Petone Ave
Petone
Wellington
NEW ZEALAND
Ph 04 576 2530
PO Box 39 383
Howick, Auckland
NEW ZEALAND
sales@transnet.co.nz

TransNet Tonga

Nuku'alofa

Lakalakaimonu Multi Utility
Complex
Taufa'ahau Road
Poutaha
Nuku'alofa
TONGA
Ph +67 627 939
PO Box 2932
Nuku'alofa
TONGA
transnet@kalianet.to

TRADES SERIES RECHARGEABLE FLASHLIGHT

CAT No.: NH15GTS

1500 LUMEN
Working time : 6.5HRS
Charging time : 5HRS
IP: IP67
USB-C
Beam distance : 105M
Zoomable : Twist zoom



CAT No.: NH31GTS

3100 LUMEN
Working time : 8HRS
Charging time : 7HRS
IP: IP67
USB-C
Beam distance : 175M
Zoomable : Twist zoom



TRADES SERIES RECHARGEABLE SITE LIGHT

CAT No.: NHWL30L

30W
3000 LUMEN
Working time : 11HRS
Charging time : 3HRS
IP: IP67
IK: IK07
USB-C



CAT No.: NHWL50L

50W
5000 LUMEN
Working time : 10HRS
Charging time : 5.5HRS
IP: IP67
IK: IK07
USB-C



650 LUMEN HEADTORCH

CAT No.: NHHL5W650L

Working time: 8HRS
Charging time: 2.5HRS
IP: IP67
USB-C



TransNet NZ Ltd has made every reasonable effort to ensure the accuracy of this information and it is to the best of our knowledge correct and reliable. Under no circumstances does this constitute an assurance of any particular quality or performance and users should independently evaluate the suitability of products for their desired application. All information in this publication including pricing, drawings, illustrations, images and graphic designs are reflections of our current understanding. TransNet NZ Ltd reserves the right to make any adjustment to this information at any time. Our liability for the products outlined in this publication is set forth in our standard terms and conditions of trade. In case of any potential ambiguities or questions, please contact us for clarification.

