





# LV JUICE

# ACOUSTIC

FOR CONTROL OF NOISE LEAKAGE

The Phonic Acoustic Flush Box (PFB) maximises the acoustic performance of mounting switches and power outlets.

PFB has the addition of an outer flange, designed to seal to the wall lining. This limits air gaps that cause sound leakage while damping vibration in the flush box. Testing shows that the use of the PFB maintained the overall system acoustic performance of a test wall.

PFB has an intumescent pad installed, which expands when exposed to fire. Tested to AS1530.4:2014 and AS4072.1:2005 for fire rating.



VIEW THE **SPECSHEET** 





# **Features**

- Control of noise leakage tested to ISO 10140-2:2010
- Up to 120min fire rating as per AS1530.4:2014
- Quick and simple installation
- Can be used back-to-back
- No additional products required for fire and acoustic performance
- Replaces any standard flush box



**This Month** 

WHILE STOCKS LAST



# MOLLY WOPPY COOKIE

When you spend over \$400 (+GST) on one invoice this month



**CUSTOM STREETLIGHT CONNECTIONS** 

PAGE 3

SPECIAL DEAL FOR LED RETAIL CEILING LAMP

PAGE 5

**OUR LATEST PORTABLE** APPLIANCE TESTER KITS PAGE 7

# THE BEST GEL FILLED PRODUCTS



# RAYGEL PLUS 3 STREET LIGHT JOINT

A fast, simple and reliable connection for streetlight joints up to 16mm<sup>2</sup> Neutral Screen cables.



# **EASY TO INSTALL**

Closing the rugged RayGel closure is literally a snap. The short lengths also allow for installations in cramped locations. No special tools needed, no rip cords to break, and no trimming, mixing, pouring, or heating is required. The RayGel closure covers and seals the joint quickly and easily, saving both time and effort. RayGel can immediately be put into service.

# **FEATURES**

- Quick and easy installation
- Unlimited shelf life
- Suitable for outdoor and direct burial situations
- Full branch capabilities without cutting the main cable
- Qualified to joint standard EN 50393
- Halogen free and UV resistant



2.5mm<sup>2</sup> 2 core neutral screen to 16mm<sup>2</sup> 4 core neutral screen



# GELCAP SL SPLICE KIT

This kit provides quick installation, dependable performance and easy re-entry for street lighting connections and more with a superior moisture seal over a wide conductor range.



AUTHORISED DISTRIBUTOR



### **POWERGEL SEALING GEL TECHNOLOGY**

The revolutionary PowerGel sealing gel is rated to 90°C continuous temperature and is halogen-free with an unlimited shelf life. RayGel is qualified to CENELEC HD623 for buried applications. This includes a three week heat-cycling test with the joint immersed in one metre depth of water.

### **FEATURES**

- Temp range -40°C to 105°C
- Cap is UV stable, insulating and offers excellent abrasion protection
- Two bolts in tap hole
- Simple Allen Key fastening
- Range Taking Connector 2 x 2.5mm<sup>2</sup>-70mm<sup>2</sup> and 1 x 2.5mm<sup>2</sup>-10mm<sup>2</sup>
- No extra materials or greases are required

# TRANSNET MONTHLY GIVEAWAY SUPPORTING KIWI BUSINESSES

You got a lot of Christmas cheer from their festive cookie, so we've brought them back with some true classics. For this month's locally made giveaway we've chosen Molly Woppy's handcrafted artisan cookies again, and since we couldn't decide which flavour is our favourite we've got a selection of three! Will you get Milk Choccy Chunk, Afghan, or Peanut Butter Dark Choc with your order? They're all made with premium ethically

www.mollywoppy.co.nz/

sourced ingredients so you really can't go wrong. Make sure you have a cuppa ready so you can enjoy them

the way they're meant to be enjoyed – with your feet up!





# FUSED STREETLIGHT BOARD

Light poles are classified as an 'electrical installation' under electricity regulations, meaning they carry highly specific legal requirements in relation to earthing, protection and isolation devices.

"An electrical installation needs an isolating device, formal protection, an earth neutral bar, and an earth stay," and the TNSPLKIT is just the answer!

If you have specific requirements we can help! Contact us about designing a specific streetlight board to suit your needs.

# FEATURES OF TNSLPKIT

- Removable MEN link
- Fuse carrier includes 6A 10x38mm barrel fuse link
- Noark fuse carrier meets requirements of IEC/EN 60947-3
- All brass electrical connections
- Rated to 32A
- Stainless steel spring loaded mounting hook
- Dimensions: 285H x 50W x 90-110D\* (mm)
- Fuse carrier terminal capacity 1-25mm<sup>2</sup>


\*90mm closed, 110mm open



Removable MEN Link

Built in hook for easy mounting

Customised designs available

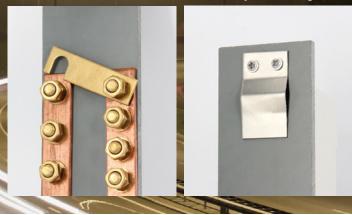





Cat No. TNSLPKII (above)


# **NEW NVENT CADDY CABLE SOLUTIONS**



# ROD LOCK WIRE BASKET SUPPORT CLIP

Wire Basket Supports clip to the sides of standard wire basket trays, eliminating the need for strut channels when supporting wire baskets with threaded rod. Multiple variations are available to suit most installations, and enable quick installation and adjustment of multi-level trapeze assemblies.




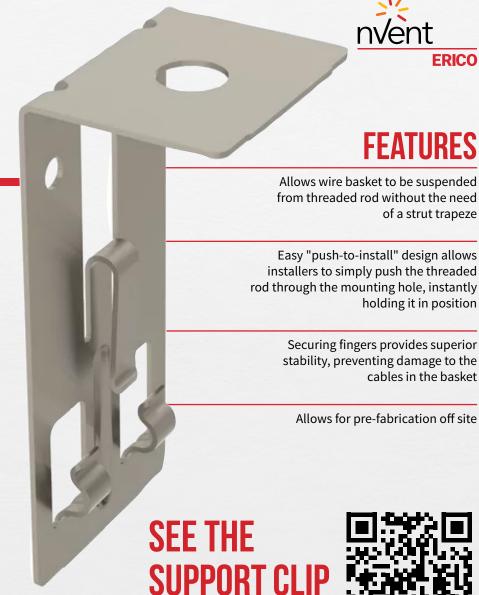

IN ACTION







# **RETAIL CEILING LAMP WITH SENSOR**



# \$55.00<sub>+GST</sub> SPECIAL PRICE









# LEDBKHD-16SEN

# RETAIL LED CEILING LAMP


Easily adapts to different locations and applications onsite with **adjustable colour temperature** and **sensor** settings.

With a neat and stylish design this LED bulkhead lamp range looks great anywhere. Its LED light source provides excellent levels of brightness at a lower cost than traditional bulkhead lamps, with robust plastic housing perfect for busy public spaces such as passageways, stairwells, retail and offices.

# **FEATURES**

- Surface mounting
- IP44 rating
- Dual CCT (3000k/4000k)
- High/low options available
- Master/slave function
- >60,000 hour lifespan
- Onboard motion/ daylight sensor with 3 step dimming

# SENSOR OPTIONS

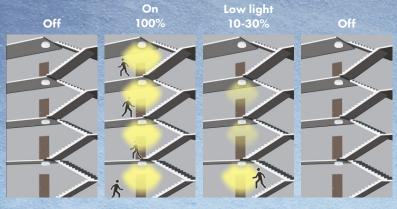

# TECHNICAL SPECIFICATIONS

CAT. NO.	LEDBKHD-16SEN
INPUT VOLTAGE	220-240V~50Hz
LED TYPE	SMD2835
TOTAL POWER	16W
FIXTURE LUMENS	1500lm
SENSOR	Yes
LIFESPAN	>50,000hrs
IP RATING	IP44



# Arc Rated Merino Base Layers

ATPV 4.2cal/cm<sup>2</sup> Arc Rating - Available Now

These superior quality garments are designed for the workplace and offer ultimate comfort and durability. Merino wool provides natural warmth, breathablility, and temperature regulation, and is blended with FR treated Viscose.

# **Features**

- High quality 50%
   Merino Wool / 50% FR
   treated Viscose fabric
   sewn with FR thread
- ATPV 4.2cal/cm<sup>2</sup> Arc Rating



- Size options from s-3XL
- HRC1 labels are sewn into each garment
- · Machine washable & quick drying





# Compliance & Standards

### AS/NZS 1906.4:2010

Hi Visibility material for Safety Garments

• Class D: Daytime use

### Durability

- AS 2001.4.15:1994 Determination of Colourfastness to Washing
- AS 2001.4.EO4:2005 Determination of Colourfastness to Perspiration
- AS 2001.4.Bo2-2001 Colourfastness after LIV Exposure (Drv)

### **ASTM F1506-18**

Garments for Electrical Safety in the Workplace

- ASTM F1959/F1959M-14 Arc Rating: ATPV 4.2cal/cm<sup>2</sup>
- NFPA70E CAT1: HRC1/PPE1
- ASTM6413/6413M-15
   Vertical Flame Test



# **NEW TEST & MEASUREMENT PRODUCTS**



Our latest TRANSDELTA4-G kits with the new **Godex RT200 printer** and Samsung tablet offer everything you need for portable appliance testing.

# TRANSDELTA4-G PORTABLE APPLIANCE TESTER KITS

# THE FOLLOWING TESTS CAN BE PERFORMED:

- Functional and visual inspection
- · Earth bond resistance
- Insulation resistance; insulation resistance of isolated accessible conductive parts
- Differential leakage current test
- Touch leakage test
- Substitute leakage current; Substitute leakage current of isolated accessible conductive parts
- PRCD test
- · Power test
- IEC cord polarity test
- TRMS voltage meter

# MI3309BT KEY FEATURES

- Graphic high resolution LCD with with backlight
- Large green & red lights for additional PASS / FAIL indication at sides of LCD
- Large data flash memory for storing test results & parameters
- Two PC communication ports (USB & RS232C)
- Built-in real time clock
- Bar-coding system for quick test code selection and ID of device under test
- Programmable limits for PASS/FAIL evaluation
- Fully compatible with new Metrel PATLink PRO PC software package
- · Portable and lightweight design
- · Rechargeable with built-in charging circuit
- · Operates on mains power or batteries

# GODEX RT200 PRINTER KEY FEATURES

- 250 or 500 Tags on each roll
- Bluetooth connection to MI3309BT
- Linear Barcode or QR code
- Custom logo on tags
- High efficiency and reliability
- Tough synthetic labels
- Most cost effective tag printer available
- Operating voltage 100–240V AC or optional rechargeable battery pack



# **CONTACT US TO ORDER**



# RAIN OR SHINE, STAY DRY

# Pop'N'Work Pop Up Tents



### **Auckland**

78 Cryers Road East Tamaki Auckland NEW ZEALAND Ph 0800 442 182 PO Box 39 383 Howick, Auckland

### Wellington

10 Petone Ave Petone Wellington NEW ZEALAND Ph 04 576 2530 PO Box 39 383 Howick, Auckland NEW ZEALAND

### TransNet Tonga Nuku'alofa

Lakalakaimonu Multi Utility Complex Taufa'ahau Road Poutaha Nuku'alofa TONGA Ph +67 627 939 PO Box 2932 Nuku'alofa

transpot@kalianot to



Pop 'N' Work pop up work tents and umbrellas have been made in America for over 35 years. Available in a range of sizes and styles, these high quality shelters are easy to use and protect field staff from UV and rain when working in the elements.

### **FEATURES & BENEFITS**

- Safe and comfortable work environment
- Made from a lightweight, UV stable protective polyester
- Water repellent
- Flame resistant to CPAI-84 standards
- Pitched roof provides extra headroom and structural strength to hang tools and lights
- Reduced weather related delays and increased productivity
- Sizes from 4' x 4' up to 12' x 10'
- 2 year guarantee on the frame

# CONTACT US TODAY FOR MORE INFO AND TO ORDER

### **INDUSTRY APPLICATIONS**

- Telecom
- Welding
- Oil and Gas
- Utilities
- · Railroad
- Construction
- · Emergency Response

### **TIME SAVING**

- · Set up in seconds
- No loose parts
- · Lightweight and durable
- Convenient Pop'N'Work Quick-Pack tent rolls up into carrying case, no separate bag needed

# **ENGINEERED FOR DURABILITY**

 Exclusive Pop'N'Work unified frame made with cold rolled steel and fibreglass is virtually unbreakable







**GROUND TENTS** 







