

LV DIN EARTH SET - 1115281041T

- FOR FUSE OUTLET

This earthing set is designed for earthing of LV DIN fuses. The set consists of short-circuiting cartridges, short-circuiting Cu cables in transparent insulation, earthing Cu cable, earthing clamp and insulating pole enabling you to safely attach the set. The insulating pole is made of glass fibre laminate which is suitable for its high electrical and mechanical resistance and stability. The set is suitable for indoor and outdoor use and is produced according to standards CSN EN 61230, IEC 1230, PNE 35 9705, DIN 46 235.


Maintenance Requirements

The earthing set must be kept in good condition, it must not be mechanically damaged. Its surface must remain clean and dry. During storage, the earthing cables must also remain dry. A visual check must be carried out before every use. This unit must be periodically tested in accordance with NZ requirements.



Key

- 1 - Short-circuiting cartridges
- 2 - Insulating pole (model P)
- 3 - Earthing clamp
- 4 - Short-circuit cables
- 5 - Earth cable

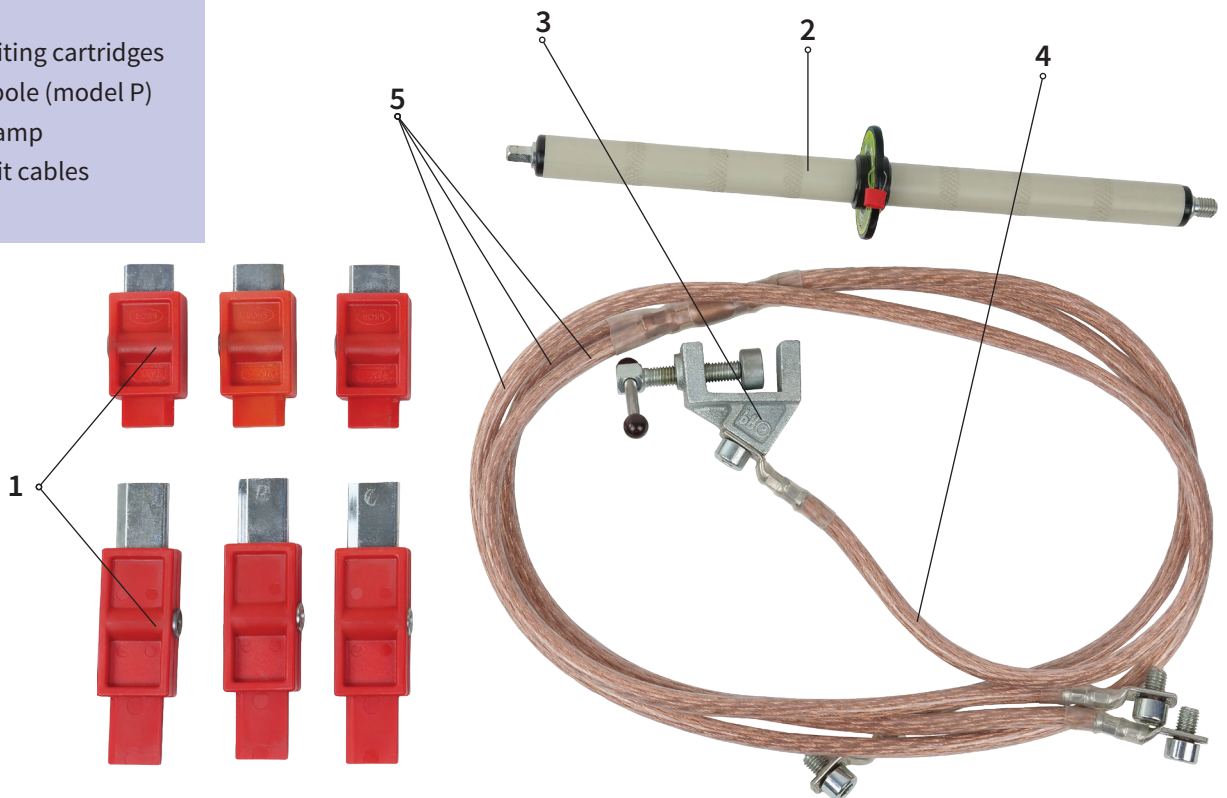

Technical Data

Climatic group	Normal from -25 to +55°C		Pole material	Glass fibre laminate
Rated short-time withstanding current	6 kA/1s	8.5 kA/0.5s	Cross section of cable	25 mm ² short-circuiting
Length of pole	350 mm			25 mm ² earthing
Length of handle	160 mm		Length of cable	500 mm short-circuiting
Equipment versions	801.001 - P (with insulating pole)			1500 mm earthing
	- H (with fuse handle)		Weight of equipment	4.5kg

Testing

This earthing set is type-tested according to standards CSN 35 9700, PNE 35 9705, CSN EN 61230 and IEC 1230 by the authorised laboratory. Each set is separately tested piece by piece before expedition and plumbed or labelled too. The plumb or label included the test date and the number of the authorised laboratory.

Packing


This earthing set is delivered in a sturdy plastic storage box. Included in the box are instructions for use, function description and the quality and test certificate.

Storage

This unit must be stored in a clean dry place in its plastic storage box to protect against mechanical damage.

Warranty

A 24 month warranty is provided on this product. The warranty is limited to manufacturing defects only.

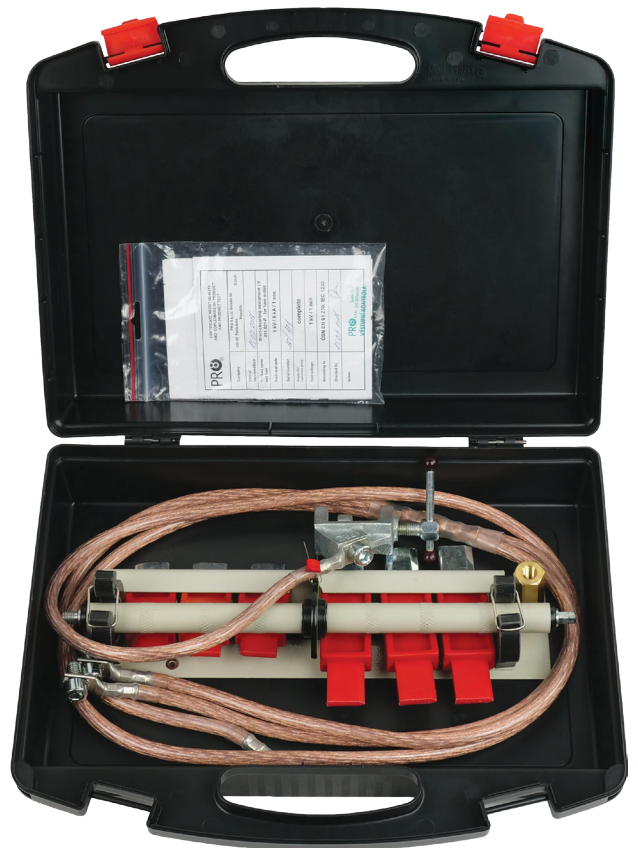

CAT No. 1115281041T