


VPT Series

First and Only Round Transparent Polymer IR Window

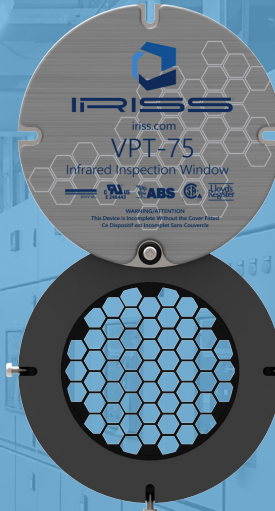

Stress-Free Viewing

The polymer-based infrared window maintains fixed and stable transmission (FAST) for life as the polymer is unaffected by environmental and mechanical stresses commonly seen with crystal based infrared windows.

Arc Containment Tested

The VPT Series was successfully tested to the IEC 62271-200 standard for arc containment on metal enclosed switchgear assemblies.

UL Listed

Having passed rigorous standards and testing, our inspection windows are UL Listed (E491496). This demonstrates our dedication to continued safety and security in the ever-changing world of electrical power and distribution.

An evolutionary step in infrared (IR) windows, the VPT Series utilizes our exclusive Poly-View System™ technology to allow the use of any thermography camera to monitor energized electrical equipment. The world's only clear polymer IR window optic enables visual inspections, traditional IR inspections utilizing cameras across the entire IR spectrum, and allows for UV inspections to be performed with a corona camera. The VPT Series IR windows are industrial grade, with a patented reinforced grill that exceeds high voltage switchgear viewing pane standards.



Specifications

Model	VPT-50	VPT-75	VPT-100
General Specifications			
Overall Dimensions	9.1 cm (3.6 in) Ø	12.1 cm (4.8 in) Ø	15.1 cm (5.95 in) Ø
Overall Thickness	2.6 cm (1.0 in)	2.6 cm (1.0 in)	2.6 cm (1.0 in)
IP/ NEMA Environment Rating	IP67 / NEMA 6		
Operating Temperature	-40°C (-40°F) to 273°C (523°F)		
Body Material	UL 94 5VA Nylon (switchgear-grade plastic); -40°C (-40°F)to 273°C (523°F); aluminum cover		
Gasket Material	UL 94 5VA TPE; -40°C (-40°F) to 273°C (523°F)		
Hardware Material	316 Stainless Steel		
Voltage Range	Any		
Automatically Grounded	Yes		
Optic Specifications			
Viewing Aperture Dimensions	5.1 cm (2.0 in) Ø	7.6 cm (3.0 in) Ø	10.2 cm (4.0 in) Ø
Optic Material	Poly-View™ UL 746 compliant, visual, UV and IR transmissive polymer; -40°C (-40°F) to 325°C (617°F)		
Optic Reinforcing Grill Material	Aluminum Reinforcing Grill (IP22/ IP2x Standard)		
Inspection Capabilities and Applications			
Midwave IR and Longwave IR; Ultraviolet (UV); Visual Inspection; Medium/High Voltage Applications			
Certifications			
UL Listed (E491496)			
Certified by UL (USA) & cUL (Canada) to the following standards: 50V, 50E, 756C: Impact and Flammability, 746C & 746A-2012, 1558: Impact and Load Resistance, 508A: ANSI 508A			
CSA C22.2 No. 14-13, C22.2 No. 14-10, C22.2 No. 94-M91, C22.2 No.94.1-07, C22.2 No. 94.2-07			
Lloyds of London Type Approval			
American Bureau of Shipping (ABS)			
DNV (Det Norske Veritas) P261.1E Maritime, Vessel and Offshore Applications			
IEEE C37 20.7 Type 2B, C37 20.2.a.3.6: Impact and Load			
IEC 62271-200, 60262271-200,60298 Appendix A, 60068-2-6:2007, 60068-2-3, 60068-2-78:2012			
Other			
Warranty	Unconditional Lifetime Warranty		

*Caution: These dimensions are not installation dimensions. Do NOT cut prior to receiving your IRISS IR window and installation template. Specifications are subject to change without notice. For the most up-to-date specs, go to www.iriss.com

Distributed by



78 Cryers Road, East Tamaki, Auckland 2013
+64 9 274 3340 | sales@transnet.co.nz | www.transnet.co.nz



www.iriss.com

©2021 IRISS, Inc. All rights reserved. Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. Modification of this document is not permitted without written permission from IRISS Inc.