

MI3155 EUROTEST XD

- MULTIFUNCTIONAL ELECTRICAL INSTALLATION TESTER



MI 3155 EurotestXD is the newest flagship of Metrel's most advanced line of multi-functional measuring instruments and is designed specifically for testing in industry. What differentiates this instrument from the rest is its ergonomic design and an intuitive user interface, encompassing a memory organizer and fully programmable AUTO SEQUENCES, managed through a large colour touch screen display. It is fully compliant with functionality standards (e.g. IEC/EN 61557) and other reference standards for testing (e.g. IEC/EN/HD 60364-4-41,...) as is required for any instrument that performs TRMS current measurements, RCD tests, line and loop impedance tests with 3 (and 4) wires and earth resistance measurements. Besides those, the instrument supports a wide range of tests and measuring functions, including on-line voltage monitoring, phase sequence testing, varistor testing, PI/DAR calculation, luminance measurement, discharge time testing, ISFL measurements, IMD tests as well as functional and visual inspections.

MEASURING FUNCTIONS:

- **Live Transformer's Impedance Measurement with Four Wire Test**
- Hi-precision Short Circuit Current evaluation with Calculated Hot factor
- **3-wire test of PE** (RPE function) without extension lead conductor
- **Autotest insulation function between L-N, N-PE and L-PE** (R ISO ALL function)
- **4 wire continuity test**
- Insulation resistance with **DC voltage from 50 V to 2500 V** and **PI, DAR calculation**
- **Varistor test**
- Continuity of PE conductors with 200 mA DC test current with polarity change
- Continuity of PE conductors with 7 mA test current without RCD tripping
- **2-wire and 3-wire loop impedance (L-PE)** measurement with Trip Lock RCD function
- **Touch voltage / Contact voltage** measurement with external P/S probe
- **2-wire & 3-wire line impedance (L-L, L-N)**
- **1-phase / 3-phase TRMS voltage & frequency**
- Phase sequence
- **Line, loop and RCD** measurements at **16...400 Hz**
- Power & THD measurement (up to 12th harmonic)
- RCD testing (general and selective, type AC, A, F, B, B+, **MI RCD, 6 mA DC EV RCD, PRCD, PRCD-K, PRCD-S**)
- **Earth Loop Impedance testing without tripping 6 mA RCD-DD in EV charger.**
- Earth resistance (3-wire & 2-clamps method)
- Specific earth resistance with Ro-adaptor (option)
- TRMS leakage and load currents (option)
- First fault leakage current (ISFL)
- Testing of Insulation Monitoring Devices (IMDs)
- **Machine mode support** with time discharge
- Illumination (option)
- High resolution Loop impedance (mΩ) (option)
- **EVSE** (Electrical Vehicle Supply Equipment) **support** (option)
- Determining location of cables (option)
- QR and/or barcode scanner support (option)

KEY FEATURES:

- **Programmable AUTO SEQUENCES.** *
 - **Predefined profile dependent AUTO SEQUENCES.**
 - **Predefined Automatic tests:**
Auto TT (U, Zln, Zs, Uc);
Auto TN/RCD (U, Zln, Zs, Rpe);
Auto TN (U, Zln, Zlpe, Rpe);
Auto IT (U, Zln, Isc, Isfl, IMD).
 - **Functional inspections.**
 - **Visual inspections.**
 - **Custom inspections** (visual and functional) which may be incorporated into AUTO SEQUENCES.
 - **EVSE AUTO SEQUENCES** and **function inspections;**
 - **Machine functional and visual inspections;**
 - **Built-in help screens** for referencing on site.
 - Built-in fuse tables for automatic evaluation of the line / loop impedance result.
 - **Monitoring of all 3 voltages** in real-time.
 - **Automatic polarity reversal** on continuity test.
 - **Automated RCD testing procedure** (RCD AUTO).
 - **Automated Impedance testing procedure (Z AUTO).**
 - **Measurement filtering according to the selected area group.**
 - **Built-in charger** and rechargeable batteries as standard accessory.
 - **BT communication with PC, Android tablets and smart phones** via built-in BT.
 - PC SW **Metrel ES Manager** (structure and report creation, data upload/download). *
 - Optional **aMESM Android app** (structure and report creation, data upload/download). **
- * Available with MESM PRO licence
** Available with EU Set



MI3155

TECHNICAL SPECIFICATIONS



Function		Measuring range	Resolution	Accuracy
CONTINUITY	Test Current 7 mA 2-wire	0.00 Ω ... 19.99 Ω 20.0 Ω ... 1999 Ω	0.1 Ω 1 Ω	±(5 % of r. + 3 digits)
	Test Current 200 mA 2-wire	0.00 Ω ... 19.99 Ω 20.0 Ω ... 199.9 Ω 200.0 Ω ... 1999 Ω	0.01 Ω 0.1 Ω 1 Ω	±(3 % of r. + 3 digits) ±(5 % of r.) ±(5 % of r.)
	Test Current 200 mA 4-wire	0.000 Ω ... 0.049 Ω 0.050 Ω ... 19.999 Ω 20.00 Ω ... 199.99 Ω 200.0 Ω ... 1999.9 Ω	0.001 Ω 0.001 Ω 0.01 Ω 0.1 Ω	±(30 digits) ±(3 % of r. + 10 digits) ±(5 % of r.) ±(5 % of r.)
INSULATION RESISTANCE	R iso, R iso all ¹ Test Voltage 50/100/250 V	0.00 MΩ ... 19.99 MΩ 20.0 MΩ ... 99.9 MΩ 100.0 MΩ ... 199.9 MΩ	0.01 MΩ 0.1 MΩ 0.1 MΩ	±(5 % of r. + 3 digits) ±(10 % of r.) ±(20 % of r.)
	R iso, R iso all ¹ Test Voltage 500/1000 V	0.00 MΩ ... 19.99 MΩ 20.0 MΩ ... 199.9 MΩ 200 MΩ ... 999 MΩ	0.01 MΩ 0.1 MΩ 1 MΩ	±(5 % of r. + 3 digits) ±(5 % of r.) ±(10 % of r.)
	R iso, R iso all ¹ Test Voltage 2500 V	0.00 MΩ ... 19.99 MΩ 20.0 MΩ ... 199.9 MΩ 200 MΩ ... 999 MΩ 1.00 GΩ ... 19.99 GΩ	0.01 MΩ 0.1 MΩ 1 MΩ 0.01 GΩ	±(5 % of r. + 3 digits) ±(5 % of r.) ±(10 % of r.) ±(10 % of r.)
	DAR, PI	0.01 ... 9.99 10.0 ... 100.0	0.01 0.1	±(5 % of r. + 2 digits) ±(5 % of r.)
	Varistor test AC, DC ²	0 V ... 1000 V (DC) 0 V ... 625 V (AC)	1 V	±(3 % of r. + 3 digits)
	RCD	RCD Uc	0.00 V ... 19.99 V 20.0 V ... 99.9 V	0.1 V
	RCD (t),	0.00 ms ... 40.0 ms 0.0 ms ... max. time	0.1 ms	±1 ms ±3 ms
	RCD I Ramp	0.2xIΔN ... 1.1xIΔN (AC, MI, EV a.c.) 0.2xIΔN ... 1.5xIΔN (A, IΔN ≥30 mA) 0.2xIΔN ... 2.2xIΔN (A, IΔN <30 mA) 0.2xIΔN ... 2.2xIΔN (B, MI, EV d.c.)	0.05xIΔN	±0.1xIΔN
IMPEDANCE	Zline (L-L, L-N), Ipsc, Zline 4-wire ³	0.00 Ω ... 9.99 Ω 10.0 Ω ... 99.9 Ω 100 Ω ... 999 Ω 1.00 kΩ ... 9.99 kΩ	0.01 Ω 0.1 Ω 1 Ω 10 Ω	±(3 % of r. + 3 digits) ±(10 % of r.)
	Zloop (L-PE), Ipf, Zloop 4-wire ³	0.00 Ω ... 9.99 Ω 10.0 Ω ... 99.9 Ω 100 Ω ... 999 Ω	0.01 Ω 0.1 Ω 1 Ω	±(3 % of r. + 3 digits) ±(10 % of r.)
	Zs RCD ⁴	1.00 kΩ ... 9.99 kΩ	10 Ω	±(10 % of r.)
VOLTAGE	TRMS (0, 14 ... 500 Hz)	0 ... 550 V	1 V	±(2 % of r. + 2 digits)
	Frequency	0.00 Hz ... 9.99 Hz 10.0 Hz ... 499.9 Hz	0.01 Hz 0.1 Hz	±(0.2 % of r. + 1 digits)
CURRENT	TRMS, AC with A 1018, range=20 A	0.0 mA ... 99.9 mA 100 mA ... 999 mA 1.00 A ... 19.99 A	0.1 mA 1 mA 0.01 A	±(5 % of r. + 5 digits) ±(3 % of r. + 3 digits) ±(3 % of r.)
	TRMS, AC with A 1019, range=20 A	0.0 mA ... 99.9 mA 100 mA ... 999 mA 1.00 A ... 19.99 A	0.1 mA 1 mA 0.01 A	Indicative ±(5 % of r.) ±(3 % of r.)
	TRMS, AC/DC with A 1391, range=40 A	0.00 A ... 1.99 A 2.00 A ... 19.99 A 20.0 A ... 39.9 A	0.01 A 0.01 A 0.1 A	±(3 % of r. + 3 digits) ±(3 % of r.) ±(3 % of r.)
	TRMS, AC/DC with A 1391, range = 300 A	0.00 A ... 19.99 A 20.0 A ... 39.9 A 40.0 A ... 299.9 A	0.01 A 0.1 A 0.1 A	Indicative Indicative ±(3 % of r. + 5 digits)
EARTH RESISTANCE	3 wire ⁵	0.00 Ω ... 19.99 Ω 20.0 Ω ... 199.9 Ω 200.0 Ω ... 9999 Ω	0.01 Ω 0.1 Ω 1 Ω	±(5 % of r. + 5 digits)
	2 clamp	0.00 Ω ... 19.99 Ω 20.0 Ω ... 30.0 Ω 30.1 Ω ... 39.9 Ω	0.01 Ω 0.1 Ω 0.1 Ω	±(10 % of r. + 10 digits) ±(20 % of r.) ±(30 % of r.)
	Specific earth resistance	0.0 Ωm ... 99.9 Ωm 100 Ωm ... 999 Ωm 1.00 kΩm ... 9.99 kΩm 10.0 kΩm ... 99.9 kΩm 100 kΩm ... 9999 kΩm	0.1 Ωm 1 Ωm 0.01 kΩm 0.1 kΩm 1 kΩm	±(5 % of r.) for Re 1 Ω ... 1999kΩ ±(10 % of r.) for Re 2 kΩ ... 19.99kΩ ±(20 % of r.) for Re > 20 kΩ
POWER	Power (P, S, Q)	0.00 W (VA, Var) ... 99.9 kW (kVA, kVar)		
	Power factor	-1.00 ... 1.00		
	Voltage THD	0.1 % ... 99.9 %		

MI3155

TECHNICAL SPECIFICATIONS



HARMONICS	Voltage harmonics	0.1 V ... 500 V		
	Voltage THD	0.1 % ... 99.9 %		
	Current harmonics and Current THD	0.00 A ... 199.9 A		
FIRST FAULT LEAKAGE CURRENT (ISFL)	Isc1, Isc2	0.0 mA ... 19.9 mA	0.1 mA	±(5 % of r. + 3 digits)
IMD TEST	Threshold indicative insulation resistance	5 ... 640 kΩ	5 kΩ	Indicative values, up to 128 steps
ILLUMINANCE	Type B	0.01 lux ... 19.99 lux	0.01 lux	±(5 % of r. + 2 digits)
		20.0 lux ... 199.9 lux	0.1 lux	
		200 lux ... 1999 lux	1 lux	±(5 % of r.)
		2.00 klux ... 19.99 klux	10 lux	
	Type C	0.01 lux ... 19.99 lux	0.01 lux	±(10 % of r. + 3 digits)
		20.0 lux ... 199.9 lux	0.1 lux	
	200 lux ... 1999 lux	1 lux	±(10 % of r.)	
	2.00 klux ... 19.99 klux	10 lux		
DISCHARGING TIME	Discharging time	0.0 s ... 10.0 s	0.1 s	±(5 % of r. + 2 digits)
	Peak voltage	0 V ... 550 V	1 V	±(5 % of r. + 3 digits)
GENERAL	Power supply	7.2 V (4400 mAh Li-Ion battery pack)		
	Overvoltage category	600 V CAT III; 300 V CAT IV		
	Protection class	double insulation		
	COM port	BT, USB, RS232		
	Display	Colour TFT display, 4.3 inch, 480 x 272 pixels		
	Weight	1.78 kg		
	Size (l x h x w)	252 x 111 x 165 mm		
				¹ Measuring current 1 mA ... 3 mA ² Threshold current 1 mA ³ I _{test} = 20 A @ 230 V; 16 ... 400 Hz ⁴ I _{test MAX} = 0.5 x I _{ΔN} ⁵ U _{OC} < 30 V _{AC} , I _{SC} < 30 mA, f = 125 Hz

STANDARDS

Functionality

- EN 61557
- DIN 5032

Other reference standards for testing

- IEC/EN/HD 60364-4-41
- IEC/EN 61008
- IEC/EN 61009
- BS 7671
- AS/NZ 3017

Electromagnetic compatibility (EMC)


- IEC/EN 61326-1

Safety

- IEC/EN 61010-1
- IEC/EN 61010-031
- IEC/EN 61010-2-030
- IEC/EN 61010-2-032

APPLICATION

- Testing of TT, TN and IT systems
- Testing of single and multiphase systems
- Initial and periodic testing of domestic and industrial installations
- LV Installation safety testing
- Maintenance
- Lightning installations
- Testing on high & low frequency installations (boat, industrial, aircraft, railway, mining, chemistry, ferry)
- Construction sites
- Mobile LV Generator Units
- Machine and switchboard testing
- Medical installation testing
- Fire, ambulance, military & police vehicles
- Mobile Video/Audio, Concert Halls, Fairs, Playgrounds
- Electrical Vehicle Supply Equipment (EVSE) testing
- Observation of insulation trends

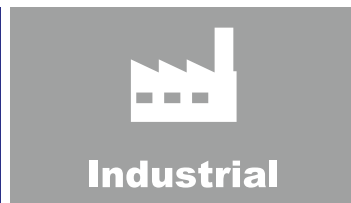

MI3155

OPTIONAL ACCESSORIES



OPTIONAL ACCESSORIES

Photo	Order No.	Acc. description
	A 1569	Power supply adapter 12 V / 3 A
	A 1567	4400mAh battery pack
	A 1568	8800mAh battery pack
	A 1551	Small carrying bag with Metrel logo
	A 1552	Large carrying bag with Metrel logo
	P 1101	BASIC to PRO licence key upgrade for Metrel ES Manager
	A 1401 BLK	Tip commander
	A 1018	Current clamp (low range, leakage)
	A 1019	Current clamp
	A 1391	AC/DC Current clamp
	A 1172	Luxmeter sensor, type B (PS/2)
	A 1173	Luxmeter sensor, type C (PS/2)
	A 1191	Receiver R10K
	A 1192	Selective probe for R10K
	A 1437	Test lead with Kelvin probe
	S 2027	Earth test set, 3-wire, 50 m
	S 2058	Insulation test plates

Photo	Order No.	Acc. description
	A 1012	Test lead, green, 4 m
	A 1154	Test lead, black, 4 m
	A 1026	Test lead, red, 20 m
	A 1153	Test lead, black, 20 m
	A 1164	Test lead, black, 50 m
	S 2012	Continuity test lead, 10 m, 2 pcs (red, black)
	S 2025	Test lead, 1.5 m, 2 pcs (black, red)
	A 1198	Magnetic contact probe
	A 1201	Insulated rod for CONTINUITY measurement
	A 1202	Additional extension part for A 1201
	A 1532	A 1532 EVSE adapter
	A 1532 XA	A 1532 XA EVSE adapter
	A 1199	Ro-adapter
	A 1632	eMobility Analyser
	MI 3144	Euro Z 800V
	MI 3143	Euro Z 440V

ORDERING INFORMATION



Standard set MI 3155 ST

- Instrument MI 3155 EurotestXD
- 4400 mAh battery pack (installed in tester)
- Power supply adapter 12 V / 3 A
- Plug commander, 1.5 m
- Test lead, 4-wire, 1.5 m
- Test lead, 3-wire, 1.5 m
- Test lead, 2-wire, 2.5 kV, 1.5 m
- Test probe, 4 pcs (black, blue, green, red)
- Crocodile clip, 6 pcs (black – 2 pcs, blue – 1 piece, green – 1 piece, red – 2 pcs)
- Earth set 20 m
- USB cable
- Soft carrying bag
- Soft carrying neck belt
- Metrel ES Manager BASIC licence*
- Short instruction manual
- Instruction manual (CD)
- Guide for testing and verification of Low voltage installations (CD)
- Calibration certificate
- Metrel ES Manager (program installation) A 1481 (CD)



Euro set MI 3155 EU

- MI 3155 ST
- 8800 mAh battery pack instead of 4400 mAh battery pack (installed in tester)
- Current clamp A 1018 (low range, leakage)
- Current clamp A 1019
- Metrel ES Manager PRO licence*
- Metrel aMESM Android app

*Metrel ES Manager can be downloaded free of charge from Metrel Web server.

Note: Photographs in this datasheet may differ slightly from the instruments at the time of delivery. Subject to technical change without notice.