
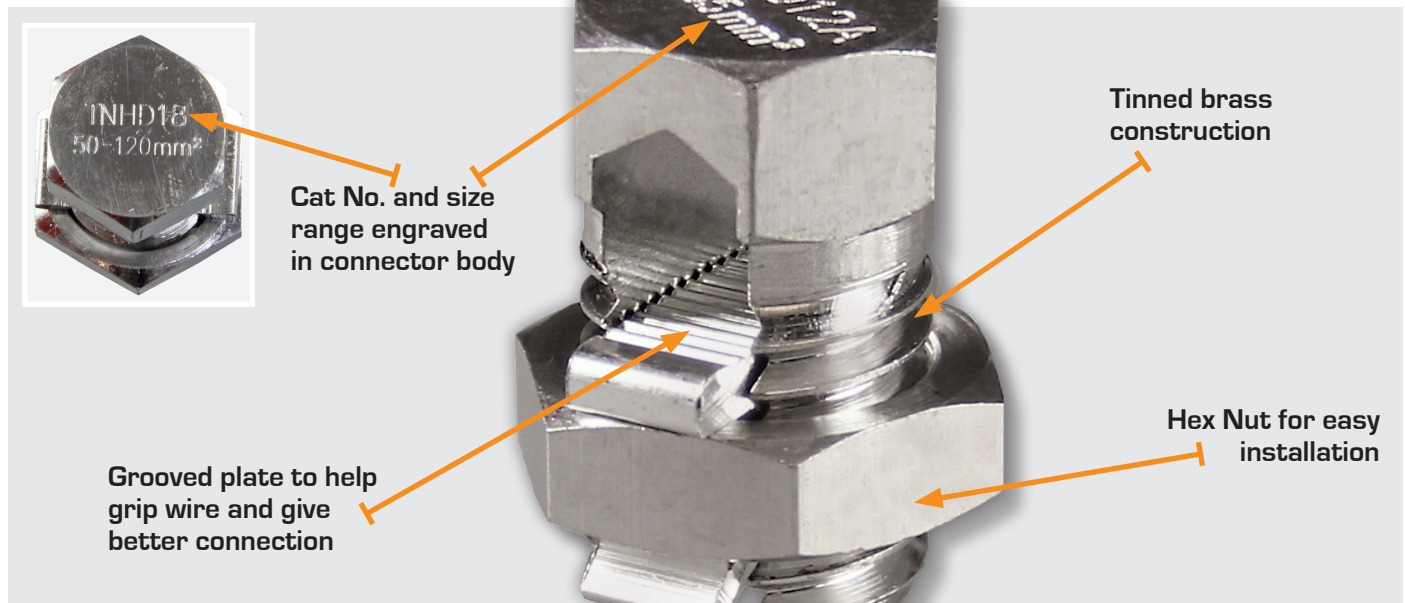


SPLIT BOLT CONNECTORS

This style of split bolt connector is recognised as a fast, simple and cost effective solution for use on overhead copper lines. The range offers a solution for wires from 2x4mm² to 2x120mm².

The part number and cable range are engraved on the connector for fast confirmation of connector choice.

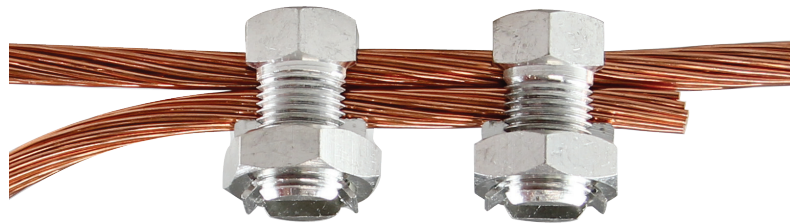

NOTE: Do not use rattle gun to tighten

CAT NO.	SIZE RANGE OF EACH CONDUCTOR (mm ²)		TORQUE SETTING (Nm)
	MIN*	MAX*	MAX
TNHD9	4	7	5-10
TNHD10	6	16	10-15
TNHD12	10	25	15-20
TNHD12A	16	35	20-25
TNHD13	25	50	40-45
TNHD14	25	70	50-55
TNHD15	35	95	105-110
TNHD18	50	120	105-110

*Min/Max of each of the two conductors being joined.

Example: TNHD10 will accommodate; 2x6mm², 2x10mm², 2x16mm² OR any combination of two of these conductor sizes (6mm²/10mm²/16mm²)

BENEFITS OF TRANSNET SPLIT BOLT CONNECTORS

- Simple to install - no special tools
- Range taking design - connectors fit multiple cable combinations
- Range accommodates 2x4mm² to 2x120mm² (in just 8 connectors)
- Can be removed easily
- Affordable
- Tinned brass for longevity
- High quality product, made in Australia

