

FUSE FITTINGS

- RATED CURRENT 32A

- Self-cleaning, self-aligning base contacts
- Clip-in fuse links, no tools required for fuse replacement
- Full shrouded contacts, IP20 degree of protection
- DIN rail mounting with easy to remove carrier
- Made from flame retardant thermoplastic

Standards

Australian Standard AS60269 and BS88 Part 6

RANGE

Rated Current (I_e): 32A

Rated Voltage (U_e): 550V

Rated Peak Withstand Current: 80kA

Rated Impulse Withstand Voltage (U_{imp}): 8kV


Screw Mounting Size (all): M5

Weight 1P (Front wire): 0.1kg

Max Cable Size (front/rear): 16mm²

Maximum Tightening Torque (front): 1.5-2Nm

Fuse Type (suit all): NS_

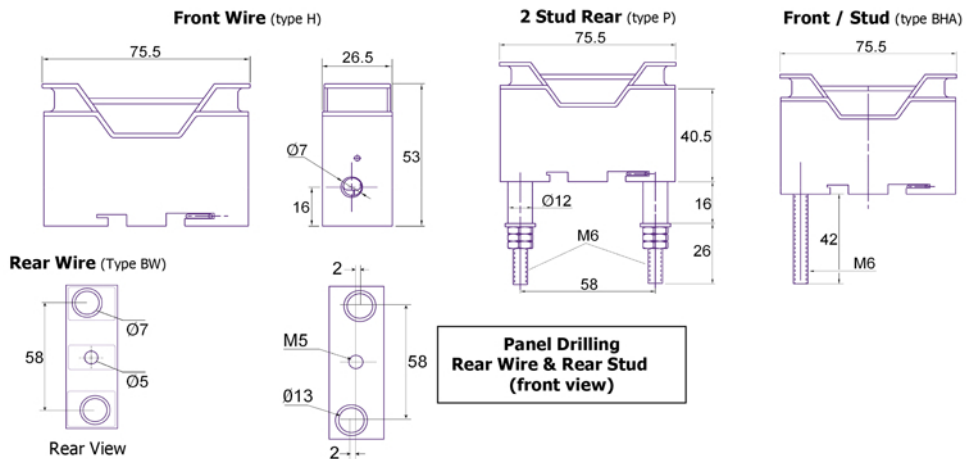

PRODUCT SPECIFICATIONS

Cat No.	Rated Current (A)	Type of Connection	Colour	Pack Quantity
TNFC32FW	32A	Front Wire Bases	Black	10
TNFC32BW		Back Wire Base	Black	
TNFC32PANEL		Busbar/Front, 1 Stud	Black	5
TNFC32STUD		2 Stud Rear, 2 Stud	Black	